


RYOBI.



REGISTERED TO
ISO 9002
CERTIFICATE
NO. A5324

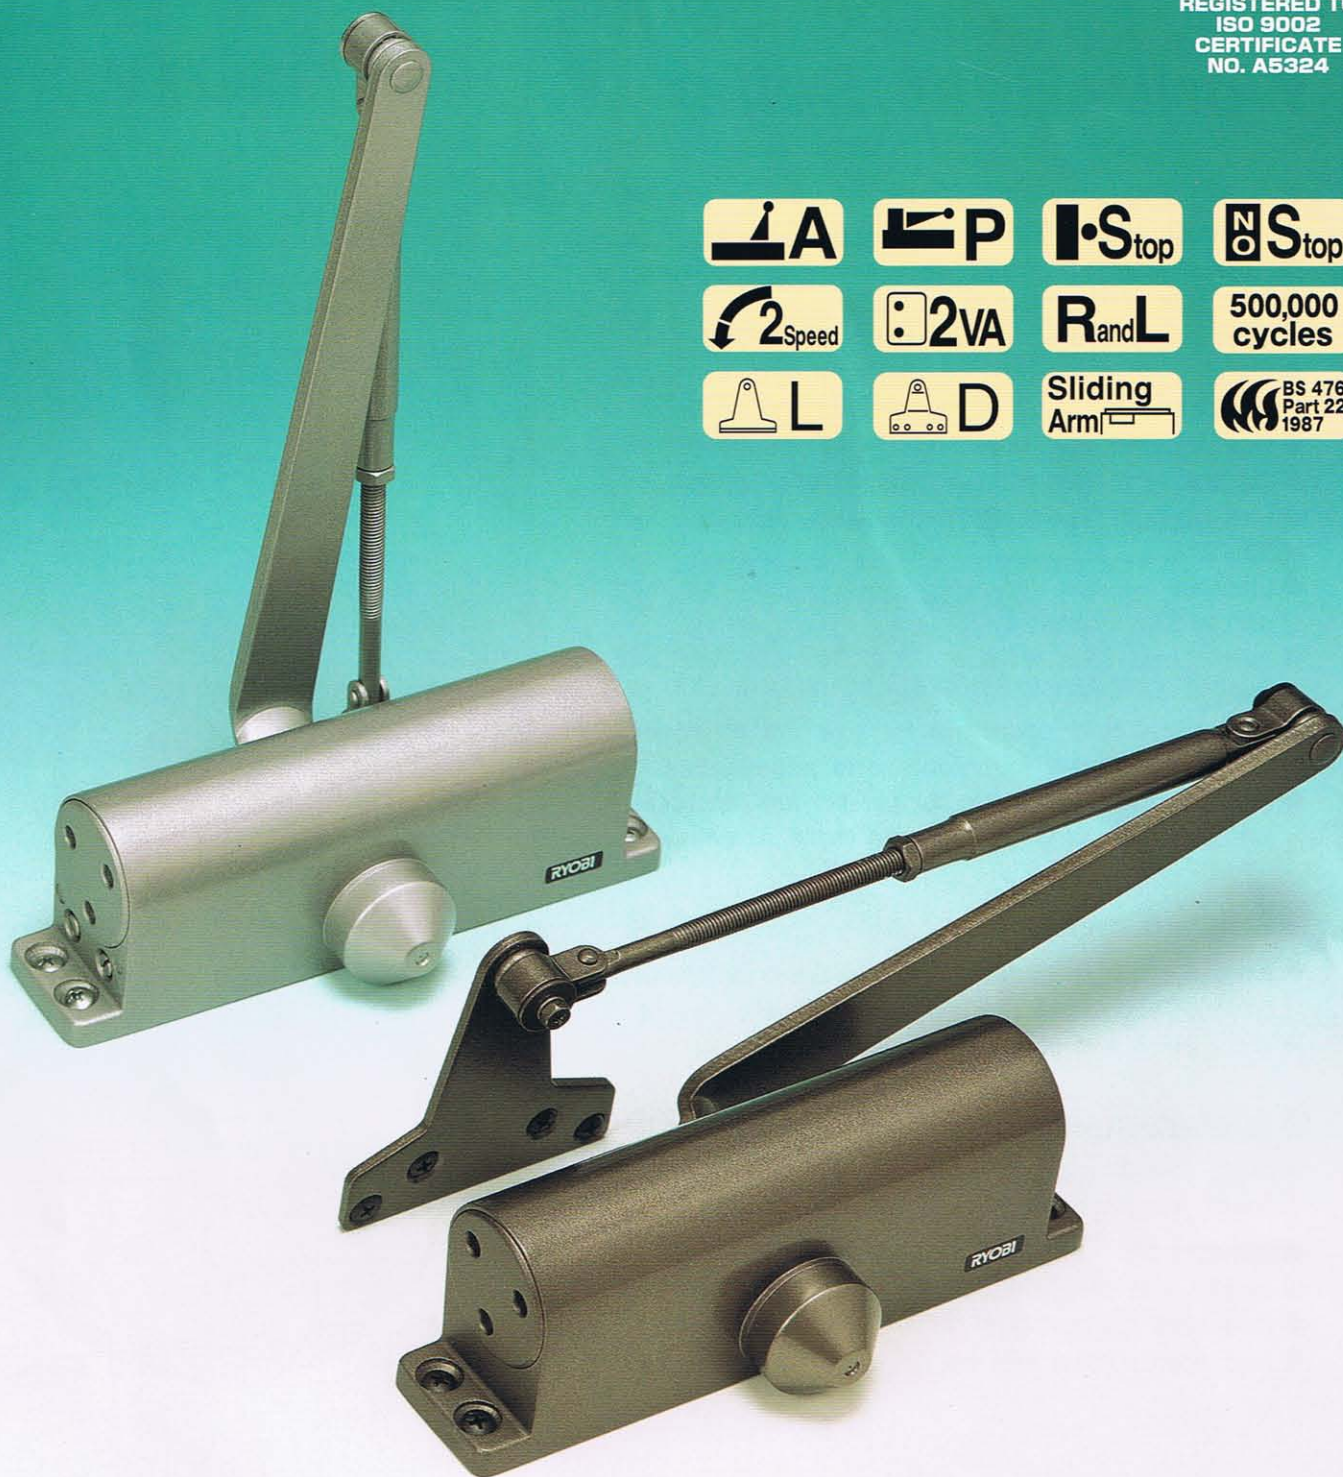

Surface Mounted Door Closer 闭门器

利优比牌60系列

RYOBI 60 SERIES

The Ryobi 60 Series... World Best Seller

- Sized closers for door sizes 1-5, door width up to maximum 1,200mm.
- High strength pressure cast aluminium housing.
- Full rack and pinion mechanism.
- Closing and latching speeds adjustable independently.
- Versatile for standard, parallel arm and top jamb application.
- Non handed and reversible for all applications.
- Suitable for both interior and exterior doors.
- Fire tested in accordance with BS476, part 22:1987.
- Universal version including standard arm set and parallel arm bracket available for certain market.
- Built-in hold open for size 1-3 at minimum additional cost.
- Mechanical hold open arm for size 2-5 as option.
- Widest variations in colours and accessories.
- Different arm and bracket for parallel arm application available depending on door and frame dimension.

Standard colours:

- Silver, C1 bronze (metallic bronze), C2 bronze (charcoal brown), C5 gold (metallic lemon)
- White, black and other colours available as option.

Available Accessories:

(Specify door size on ordering following accessories):

- standard arm set
- parallel arm set
- hold open standard arm set
- hold open parallel arm set

(Common accessories for all models):


- standard arm set
- parallel arm set
- pinion cap

Caution!

注意!

Check casted mark of RYOBI on the back of 60 Series to avoid using the imitated products!


请确认60系列本体背部“RYOBI”铸印，以免使用仿冒品。

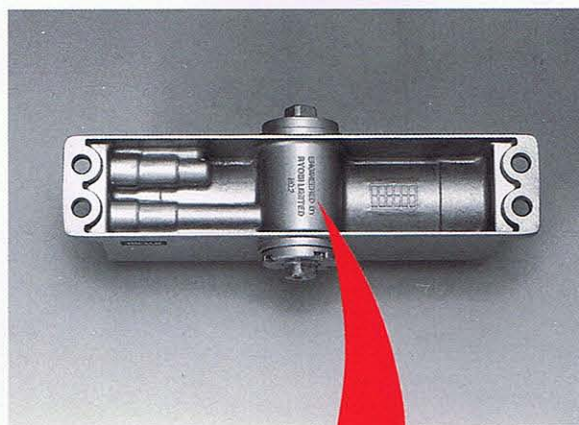

standard application			parallel arm application			universal version standard / parallel	maximum door weight (kg)	maximum door width (mm)	
without hold open	with hold open		without hold open	with hold open				without hold open	interior
	built-in	hold-open arm		built-in	hold-open arm				
61	161	—	61P	161P	—	61 Univ.	30	800	—
62	162	1620	62P	162P	1620P	62 Univ.	45	900	800
63	163	1630	63P	163P	1630P	63 Univ.	65	950	900
64	—	1640	64P	—	1640P	64 Univ.	85	1,050	950
65	—	1650	65P	—	1650P	65 Univ.	120	1,050	1,050


利优比牌 60 系列 ... 全世界最畅销的闭门器。

STANDARD APPLICATION 标准安装




RIGHT HAND DOOR SHOWN 右手开门

PARALLEL ARM APPLICATION 平行臂安装



LEFT HAND DOOR SHOWN 左手开门

TOP JAMB APPLICATION 门框顶侧安装



LEFT HAND DOOR SHOWN 左手开门

- 俱备 1 至 5 号机型, 可供门宽 1, 200 mm 为止之各式门扉使用。
- 高强度铝合金压铸成型的本体。
- 排齿与齿轴形成完美的机械结构。
- 关门及上闭速度可任意独立调整。
- 可凡用于标准, 平行臂及门框顶侧安装方式。
- 可通用于左开或右开之各式门扉
- 可通用于室内门及室外门。
- 通过英国防火检测 1987 年 BS 476, Part 22 标准。
- 为销售需求, 特列标准, 平行臂杆及支架之使用对照表。
- 以些微附加成本, 供应 1 至 3 型之内藏式止动装置。
- 可选择 2 至 5 号专用的外装止动配备。
- 备有各种色彩及各式配件。
- 适应门扉及门框尺寸, 备有平行安装方式所需之不同臂杆及支架。

标准色彩：

- 银色 C 1 铁灰色 C 2 古铜色 C 5 金黄
- 白色, 黑色及其他任意选择色彩。

可供配件：


(订购下列配件,
请注明门扉尺寸重量)

(普通配件)


- 标准型臂杆
- 平行型臂杆
- 止动式标准臂杆
- 止动式平行臂杆
- 标准型臂杆用支架
- 平行型臂杆用支架
- 齿轴盖

标准安装			平行臂杆安装			门扉重量限制 (kg)	门扉宽度限制 (mm)	
无止动 装置	附上止动装置		无止动 装置	附上止动装置			室内门	室外门
	内藏式	外装式		内藏式	外装式			
61	161	—	61P	161P	—	30	800	—
62	162	1620	62P	162P	1620P	45	900	800
63	163	1630	63P	163P	1630P	65	950	900
64	—	1640	64P	—	1640P	85	1,050	950
65	—	1650	65P	—	1650P	120	1,050	1,050

standard application 标准安装

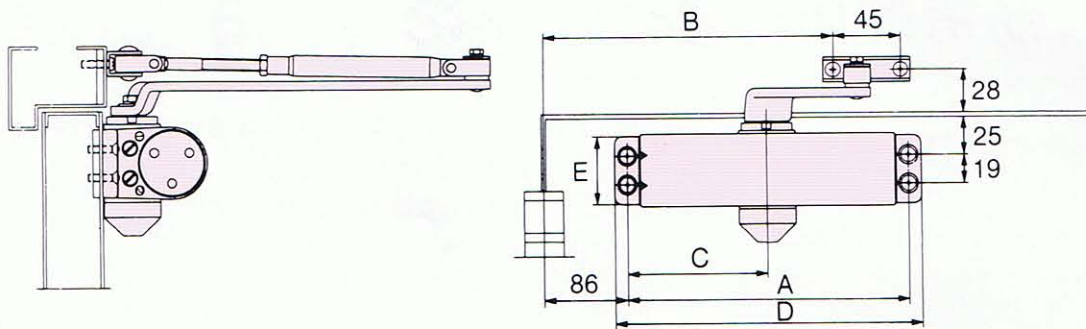

parallel arm application 平行臂安装

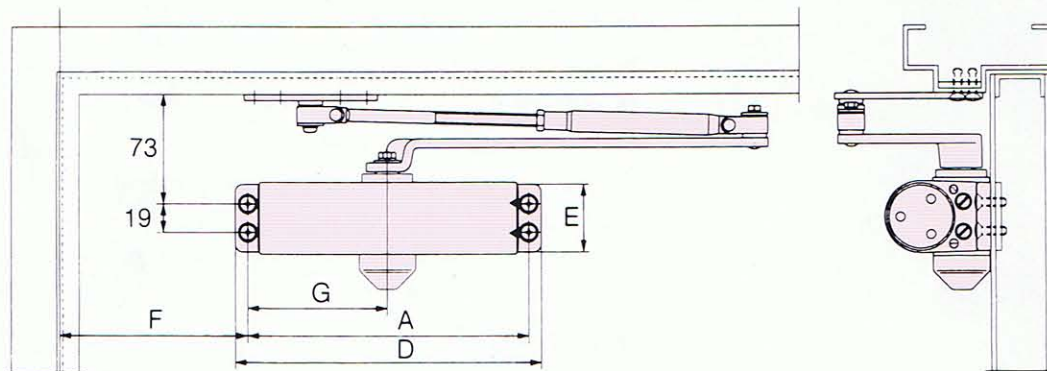

unit:mm
單位 : mm

standard application			parallel arm application			universal version standard / parallel	dimension 相关尺寸 (mm)								
without hold open	with hold open		without hold open	with hold open			without hold open	A	B	C	D	E	F	G	
	built-in	hold-open arm		built-in	hold-open arm										
61	161	—	61P	161P	—	61 Univ.	162	225	81	178	41	142	81		
62	162	1620	62P	162P	1620P	62 Univ.	188			205		116	94		
63	163	1630	63P	163P	1630P	63 Univ.	208	215	94	225	45	96	114		
64	—	1640	64P	—	1640P	64 Univ.	230			247		74	136		
65	—	1650	65P	—	1650P	65 Univ.									

REGULATING DOOR SPEED AND LATCHING SPEED 关门速度调整

