



Product Comparison List

Model No.		Net weight	Handle	No Load Speed (RPM)	 SJS II	Anti-restart function	 Soft start
180mm (7")	GA7060	5.3kg (11.7lbs)		8,500			
	GA7060R	5.4kg (11.9lbs)		8,500		✓	✓
	GA7061	5.5kg (12.1lbs)		8,500	✓		
	GA7061R	5.5kg (12.1lbs)		8,500	✓	✓	✓
	GA7062	5.4kg (11.9lbs)	D-shape	8,500			
	GA7062R	5.5kg (12.1lbs)	D-shape	8,500		✓	✓
	GA7063	5.6kg (12.4lbs)	D-shape	8,500	✓		
	GA7063R	5.6kg (12.4lbs)	D-shape	8,500	✓	✓	✓
230mm (9")	GA7064	5.3kg (11.7lbs)		6,600			
	GA9060	5.5kg (12.1lbs)		6,600			
	GA9060R	5.6kg (12.4lbs)		6,600		✓	✓
	GA9061	5.7kg (12.6lbs)		6,600	✓		
	GA9061R	5.7kg (12.6lbs)		6,600	✓	✓	✓
	GA9062	5.6kg (12.4lbs)	D-shape	6,600			
	GA9062R	5.7kg (12.6lbs)	D-shape	6,600		✓	✓
	GA9063	5.8kg (12.8lbs)	D-shape	6,600	✓		
	GA9063R	5.8kg (12.8lbs)	D-shape	6,600	✓	✓	✓

Accessories

Anti Vibration
AVT Grip Part No. 194290-6







Dust Collecting Wheel
Guard Part No. 194044-1







Photo : GA7060



Photo : GA7062R

Angle Grinder	GA7060/R, GA7061/R, GA7062/R, GA7063/R, GA7064 180mm (7")						218
 Double Insulation		GA7060 / GA7060R	GA7061 / GA7061R	GA7062 / GA7062R	GA7063 / GA7063R	GA7064	
		2,200W	2,200W	2,200W	2,200W	2,200W	
 Soft Start (GA7060R, GA7061R, GA7062R, GA7063R)		180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")	
		8,500	8,500	8,500	8,500	6,600	
 Dust Collection		7.5 m/s ²	6.5 m/s ²	7.5 m/s ²	6.5 m/s ²	4.5 m/s ²	
		91 dB(A)	91 dB(A)	91 dB(A)	91 dB(A)	91 dB(A)	
 SJS II SUPER JOINT SYSTEM		102 dB(A)	102 dB(A)	102 dB(A)	102 dB(A)	102 dB(A)	
		450x200x144mm	450x200x145mm	450x200x144mm	450x200x145mm	450x200x144mm	
		(17-3/4"x9-7/8"x5-5/8")	(17-3/4"x9-7/8"x5-3/4")	(17-3/4"x9-7/8"x5-5/8")	(17-3/4"x9-7/8"x5-3/4")	(17-3/4"x9-7/8"x5-7/8")	
		GA7060: 5.3 kg (11.7 lbs)	5.5 kg (12.1 lbs)	GA7062: 5.4 kg (11.9 lbs.)	5.6 kg (12.4 lbs.)	5.3 kg (11.7 lbs.)	
		GA7060R: 5.4 kg (11.9 lbs)		GA7062R: 5.5 kg (12.1 lbs)			
		2.5 m (8.2 ft)	2.5 m (8.2 ft)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	
		Standard Equipment : Side grip, Lock nut wrench (Tool does not come with depressed center wheel.)					

Angle Grinder	GA9060/R, GA9061/R, GA9062/R, GA9063/R 230mm (9")					218
 Double Insulation		GA9060 / GA9060R	GA9061 / GA9061R	GA9062 / GA9062R	GA9063 / GA9063R	
		2,200W	2,200W	2,200W	2,200W	
 Soft Start (GA9060R, GA9061R, GA9062R, GA9063R)		230 mm (9")	230 mm (9")	230 mm (9")	230 mm (9")	
		6,600	6,600	6,600	6,600	
 Dust Collection		6.0 m/s ²	5.5 m/s ²	6.0 m/s ²	5.5 m/s ²	
		91 dB(A)	91 dB(A)	91 dB(A)	91 dB(A)	
 SJS II SUPER JOINT SYSTEM		102 dB(A)	102 dB(A)	102 dB(A)	102 dB(A)	
		450x250x144mm	450x250x145mm	450x250x144mm	450x250x145mm	
		(17-3/4"x9-7/8"x5-5/8")	(17-3/4"x9-7/8"x5-3/4")	(17-3/4"x9-7/8"x5-5/8")	(17-3/4"x9-7/8"x5-3/4")	
		GA9060: 5.5 kg (12.1 lbs)	5.7 kg (12.6 lbs)	GA9062: 5.6 kg (12.4 lbs.)	5.8 kg (12.8 lbs.)	
		GA9060R: 5.6 kg (12.4 lbs)		GA9062R: 5.7 kg (12.6 lbs.)		
		2.5 m (8.2 ft)	2.5 m (8.2 ft)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	
		Standard Equipment : Side grip, Lock nut wrench (Tool does not come with depressed center wheel.)				

* Triaxial vector sum. According to EN60745-2-3.

weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : salesadv@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

Item code : Z-10332

PRINTED IN SINGAPORE

Satisfy Professional's Needs



Angle Grinder
GA9060 Series

HEAVY DUTY
GRINDER



GA7061/R, GA7063/R, GA9061/R, GA9063/R

Continuous Rating Input

2,200W

180mm (7")

GA7060/R, GA7061/R
GA7064

230mm (9")

GA9060/R
GA9061/R



GA7062/R
GA7063/R



GA9062/R
GA9063/R

More durable for heavy duty applications

GA7060/R
GA7061/R
GA7064
GA9060/R
GA9061/R



Photo: GA9061R

GA7062/R
GA7063/R
GA9062/R
GA9063/R

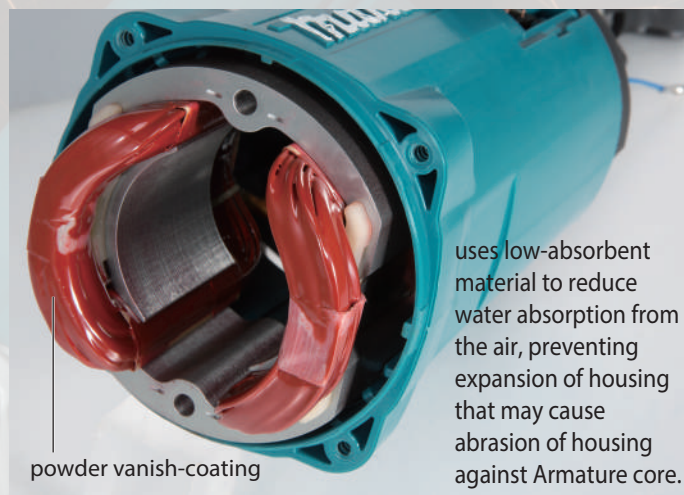


Photo: GA9062R




(GA7061/R, GA9061/R, GA7063/R, GA9063/R)
provides increased machine durability by absorbing the vibration produced by the wheel grinding or cutting material.

Rigid motor housing



uses low-absorbent material to reduce water absorption from the air, preventing expansion of housing that may cause abrasion of housing against Armature core.

Anti layer short Armature

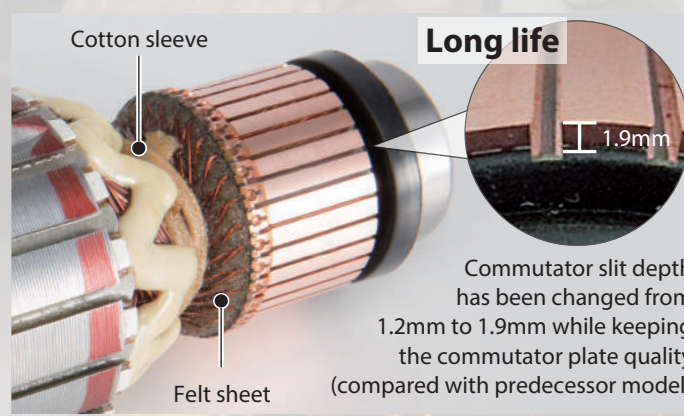

Commutator slit depth has been changed from 1.2mm to 1.9mm while keeping the commutator plate quality (compared with predecessor model)


The fixing strength of coil has been significantly improved by adding cotton sleeve and felt sheet.

Newly designed brush holder



Change from basic spring to Spiral spring without losing the compact body yet extending the working length of Carbon brush.

Switch cover and Sponge sheet

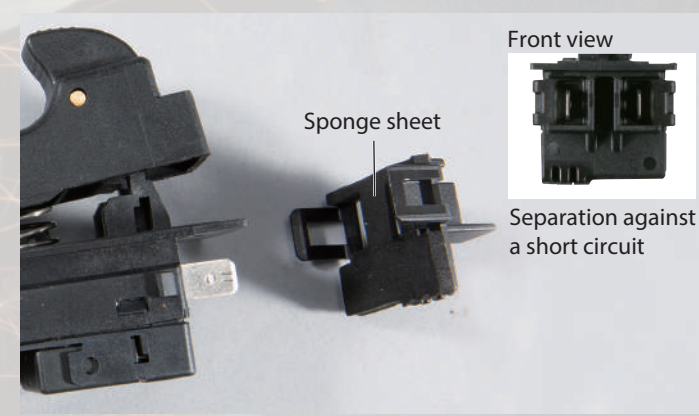

prevents entering of metal particles to Switch terminals to improve the protection against a short circuit.

Newly designed Shaft lock



enables to press the button from a slant angle, for easy handing even with protection gloves.

Anti-restart function

(GA7060R, GA9061R, GA7062R, GA7063R, GA9060R, GA9061R, GA9062R, GA9063R)
• Prevents accidental start-up even if the tool is plugged to power source with the switch "ON".
• Blinking red LED at the rear cover warns that Anti-restart function has been activated.

Soft start

(GA7060R, GA9061R, GA7062R, GA7063R, GA9060R, GA9061R, GA9062R, GA9063R)
minimizes start-up shock, and makes the tool start smoothly.